


BLAKE

General Product Specification	
Product group	Polyester flatweave
Composition faceside	100%PES
Composition backing	n/a
Coating	Needle punch
Material Weight	490 g/lm
Tariff No.	54079300
Minimum usable width	138 cm
Roll length	40 mtr
Number of colors	23

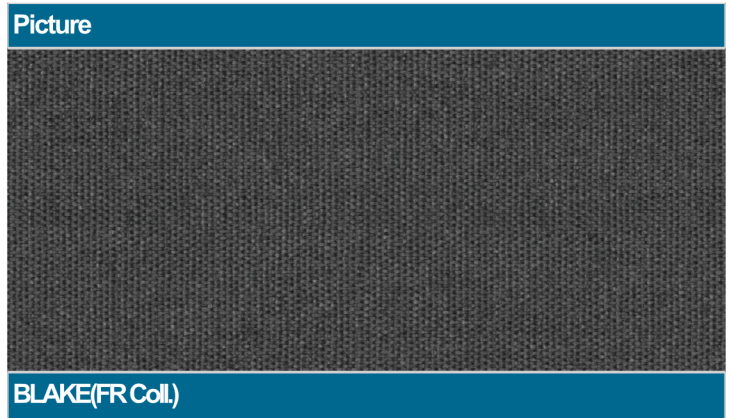

Product Specific Properties:
<ul style="list-style-type: none"> - multicoloured aspect - strong fabric, suitable for intensive use - woolly aspect - meets the Standard BS5852 Cigarette&Match

Information about the Productgroup:
<p>This is a fabric formed by 2 thread groups crossing at right angles to each other; this fabric consists of 100% synthetic fibres, in this case polyester. Polyester is strong and has a high level of abrasion resistance. The closer the threads are to each other, the higher the density and the heavier the fabric will be.</p>

Test specifications:	
Abrasion resistance <i>ENISO 12947 1 & 2</i>	> 100000 cycles till yarnbreakage Martindale
Pilling resistance <i>ENISO 12945-2</i>	class 4-5 2000 Rubs
Lightfastness <i>ENISO 105 B02</i>	Light colors 5 Middle colors 5 Dark colors 5
Tensile (breaking str.) <i>ENISO 13934-1</i>	Warp 798 Newton Weft 1344 Newton
Tear strength <i>ENISO 13937-3</i>	Warp 79,8 Newton Weft 140,6 Newton
Seam slippage <i>ENISO 13936 2</i>	Warp 3,5 mm Weft 3,1 mm
Fastness to rubbing <i>ENISO 105 X12</i>	class 4-5 Wet class 4-5 Dry

Test specifications:	
Yarn dyed	<input checked="" type="checkbox"/>
Piece dyed	<input type="checkbox"/>
Damp- prevented	<input type="checkbox"/>
Dirt-prevented	<input type="checkbox"/>
Flame resistance	<input type="checkbox"/>
Cigarette test:	BS 5852 (1979) <input checked="" type="checkbox"/>
Match test:	BS 5852 (1979) <input checked="" type="checkbox"/>

Washing Instructions
