




Orion



OEKO-TEX®
CONFIDENCE IN TEXTILES

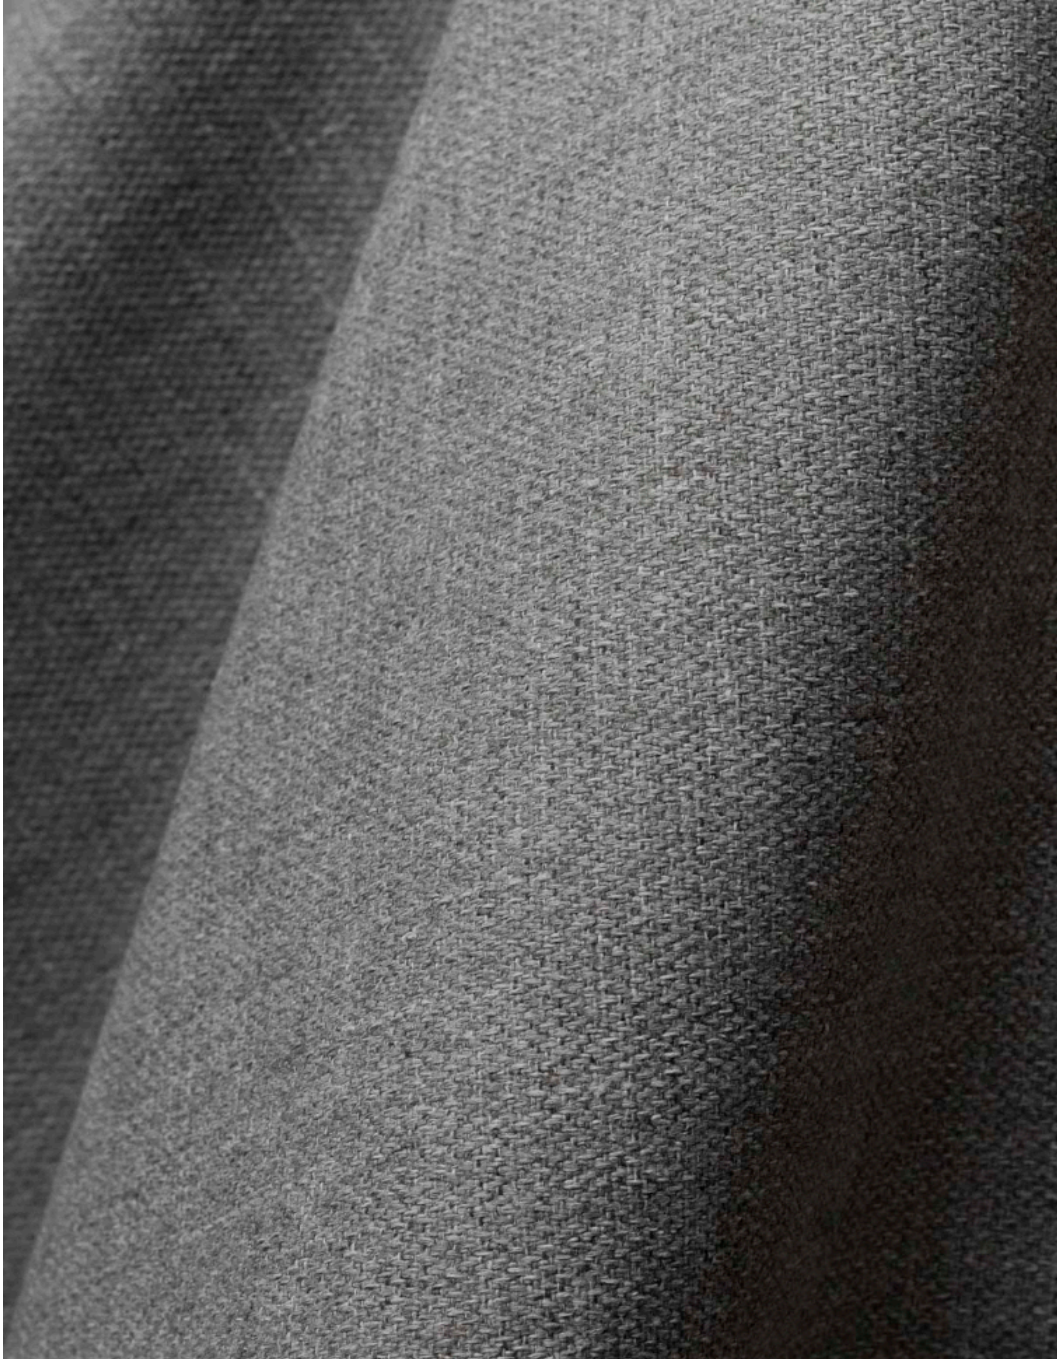

FABRAA[®]
fabrics with a conscience



Orion

This nice and luxurious flatwoven quality has a matt and linen structure. Orion is made from 100% recycled polypropylene.

We have created this sustainable textile together with a weaver who is specialized in yarn-dyed sustainable fabrics. This environmental friendly quality has been woven on a dolby loom and has a nice, luxurious linen and woolen look.

Orion is available from stock in a fresh and wide colour line, suitable for fitted and loose-fitting upholstery. Perfect to combine with other Fabraa qualities and besides that it is durable and machine-washable at 30 degrees Celsius*.

- We recommend to wash the cover inside out and immediately place the cover back to the piece of furniture slightly damp after washing.

Fabraa Upholstery fabrics with a conscience. We make sustainable choices easy by offering a wide range of high-quality, affordable upholstery fabrics with consideration for the conditions throughout the supply chain.

Composition

/ faceside 100%RPP
/ backside n/a
/ flatweave

Suitable for

sofa's, beds, chairs with fitted and loose fitting upholstery



azure 144




blossom 166



cream 02



denim 153



graphite 66




mustard 06



plumb 168



saffron 183



sepia 176



shitake 124



steel 149



taupe 12

Please note: colours may vary according to your screen settings.



terra 31



turtle 88



wood 108



Please note: colours may vary according to your screen settings.

Orion - Article passport

A nice and luxurious flatwoven quality with a dull linen structure.

Available from stock in a wide range of contemporary and commercial colours.

Product characteristics

Productgroup	flatweave
Applications	sofa's, beds, chairs with fitted and loose fitting upholstery
Composition faceside	100%RPP
Composition backside	n/a
Bonding / Coating	n/a
Statistic code	54077300
Dyeing method	yarn dyed
Available colours	15
Packaging	transparent plastic

Durability specifications

Test	Test specification	Executed by laboratory:	Unit	Testresult		Norm RALGZ430/4:2019-01		Norm DIN EN 14 465:2006-09
				Dry	Wet	DGM	DGM+	
Abrasion resistance - yarn breakage	DIN EN ISO 12947-1:2007-04, DIN EN ISO 12947-2:2017-03	CTL	cycles	50.000		min. 12.000	min. 16.000	A
Pilling	DIN EN ISO 12945-2:2000-11. 2000 cycles	CTL	grade	4-5		min. 3-4	min. 4	A
Colour fastness to light	DIN EN ISO 105-BO2:2014-11. Process 3, exposure level 5							
	light colours	CTL	grade	5		min. 4	min.5	B
	middle colours	CTL	grade	5		min. 4	min.5	B
Colour fastness to rubbing	DIN EN ISO 105-X12:2016-11							
	light colours	CTL	grade	5	5	dry: 4, wet: 3	dry: > 4, wet: 3-4	A/A
	middle colours	CTL	grade	5	5	dry: 4, wet: 3	dry: > 4, wet: 3-4	A/A
Colour fastness to rubbing	DIN EN ISO 105-X12:2016-11							
	dark colours	CTL	grade	5	5	dry: 4, wet: 3	dry: > 4, wet: 3-4	A/A
	light colours	CTL	grade	5	5	dry: 4, wet: 3	dry: > 4, wet: 3-4	A/A
Ignitability (cigarette test)	BS 5852 part 1 (1979) from The Furniture and Furnishing (Fire) (Safety) regulations: 1988 No. 1324. Schedule 4 part 1 Ignition source 0: cigarette	CTL		passed				

Processingspecifications

Minimum workable width in centimeters	± 138							
Roll length in meters	± 40							
Material weight in grams per linear meter	± 434							
Test	Test specification	Executed by laboratory:	Unit	Testresult		Norm RALGZ430/4:2019-01		Norm DIN EN 14 465:2006-09
				Warp	Weft	DGM	DGM+	
Tensile strength	DIN EN ISO 13934-1:2013-08	CTL	Newton	779	587	min. 350	min. 400	A/B
Tear growth resistance	DIN EN ISO 13937-3:2000-06	CTL	Newton	157,4	106,4	min. 25	min. 30	A/A
Resistance to seam slippage	DIN EN ISO 13936-2:2004-07. Load 180 N	CTL	mm	3,7	5,0	max. 5	max. 4	A/B
Delamination	DIN 53530:1981-02	CTL	Newton	n/a	n/a	n/a	n/a	n/a
Chemical substances	REACH	Centexbel		passed				
	Oeko-Tex, product class II	Centexbel		certified				

Cleaning specifications

Test	Test specification	Executed by laboratory:	Unit	Testresult		Norm RALGZ430/4:2019-01		Norm DIN EN 14 465:2006-09
				Warp	Weft	DGM	DGM+	
Dimensional change for washing 30 degrees celcius / air drying	DIN EN ISO 5077:2008-04, DIN EN ISO 6330:2013-02, DIN EN ISO 3759:2011-08	CTL	%	0,0	-0,4	n/a	n/a	A/A

- We recommend to wash the cover inside out and immediately place the cover back to the piece of furniture slightly damp after washing.



OEKO-TEX®
CERTIFIED



FABRAA®
fabrics with a conscience

Textafoam b.v.

La Défense 11 | 5026 SC Tilburg

P.O. Box 12 | 5050 AA Goirle

The Netherlands

T +31(0)13 534 5934

F +31(0)13 534 7586

E info@fabraa.com

www.fabraa.com