

Brema























Brema

Brema is a nice luxurious quality fabric, woven on a jacquard loom and part of our Textaafoam Performance Collection.

The performance collection only consists of fabrics that meet the highest standards in durability and maintenance, making them long lasting, easy to clean and suitable for almost every type of upholstery.

Due to the properties of the yarns used for Brema, stains hardly have any chance and can easily be taken away with nothing more than a damp cloth. No wonder this article meets all requirements of our specialty Easy Clean Collection; www.picobello-fabrics.com.

Brema combines natural and synthetic yarns. This blended type of articles look very authentic and know a continuous high market demand. Our development team added several contemporary colours creating a wide range of no less than 26 colours! All modern and with an intensity varying multi-coloured aspect to meet every style.

This durable article is fit for all types of furniture and can be washed at 30 degrees without loosing its performance characteristics.

- We recommend to wash the cover inside out and immediately place the cover back to the piece of furniture slightly damp after washing.

Textaafoamoriginals Established in 1970, this Dutch family business brings together craftsmen in textiles and furniture design to build an unrivalled portfolio in upholstery fabrics that meets buyer's needs every time. Featuring a wide colour range, ultimate value for money and excellent reliability in the supply chain.

Composition

/ faceside 39%PAC 39%PES 14%CO 8%WO / backside n/a / flatweave


Suitable for



Please note: colours may vary according to your screen settings.



Please note: colours may vary according to your screen settings.

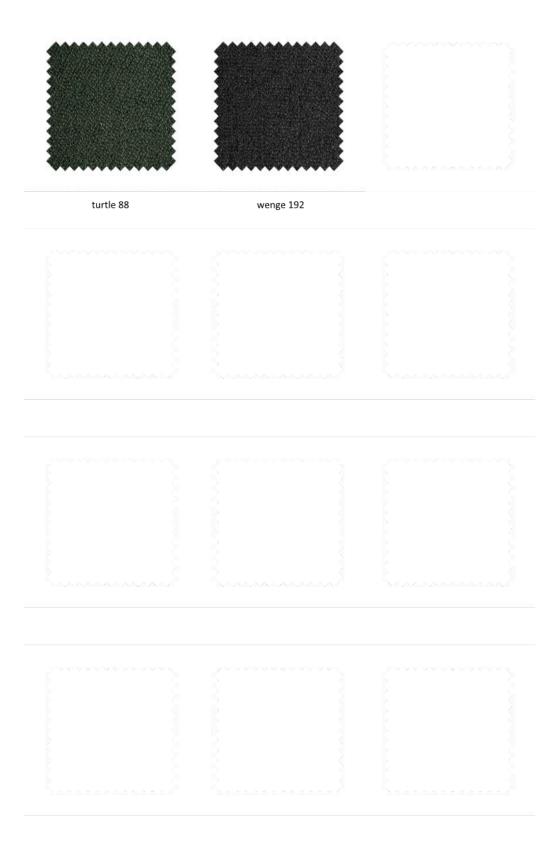

Brema - Article passport A nice and luxury quality with a multi coloured aspect and full and woolly grip.

Available from stock in a wide range of contemporary and commercial colours.

Product characteristics		
Productgroup	flatweave	
Applications	sofa's, beds, chairs with fitted and loose fitting upholstery	
Composition faceside	39%PAC 39%PES 14%CO 8%WO	
Composition backside	n/a	
Bonding / Coating	n/a	
Statistic code	58013600	
Dyeing method	yarn dyed	
Available colours	26	
Packaging	transparent plastic	

Test	Test specification	Executed by laboratory:	Unit	it Testresult		Norm RALGZ430/4:2019-01		Norm DIN EN 14 465:2006-09	
				Dry	Wet	DGM	DGM+		
Abrasion resistance - yarn breakage	DIN EN ISO 12947-1:2007-04, DIN EN ISO 12947-2:2017-03	СТІ	cycles	28.000		min. 8.000	min. 16.000	В	
Pilling	DIN EN ISO 12945-2:2000-11. 2000 cycles	СТІ	grade	4-5		min. 3-4	min. 4	А	
Colour fastness to light	DIN EN ISO 105-BO2:2014-11. Process 3, exposure level 5								
	light colours	CTL	grade	5 5 5		min. 4	min.5	В	
	middle colours	CTL	grade			min. 4	min.5	В	
	dark colours	CTL	grade			min. 4	min.5	В	
Colour fastness to rubbing	DIN EN ISO 105-X12-2016-11								
	light colours	СТІ	grade	5	5	dry: 4, wet: 3	dry: > 4, wet: 3-4	A/A	
	middle colours	CTL	grade	5	5	dry: 4, wet: 3	dry: > 4, wet: 3-4	A/A	
	dark colours	CTL	grade	5	5	dry: 4, wet: 3	dry: > 4, wet: 3-4	A/A	
Ignitability (cigarette test)	BS 5852 part 1 (1979) from The Furniture and Furnishing (Fire) (Safety) regulations: 1988 No. 1324. Schedule 4 part 1 Ignition source 0: cigarette	СТІ		passed					

Processingspecifications								
Minimum workable width in centimeters	± 138							
Roll length in meters	± 35							
Material weight in grams per linear meter	± 756							
Test	Test specification Executed by Unit laboratory:		Unit	Test	result	Norm RALGZ430/4:2019-01		Norm DIN EN 14 465:2006-09
				Warp	Weft	DGM	DGM+	1
Tensile strength	DIN EN ISO 13934-1:2013-08	CTL	Newton	993	1.400	min. 350	min. 400	A/A
Tear growth resistance	DIN EN ISO 13937-3:2000-06	CTL	Newton	89,4	193,9	min. 25	min. 30	A/A
Resistance to seam slippage	DIN EN ISO 13936-2:2004-07. Load 180 N	CTL	mm	3,0	2,3	max. 5	max. 4	A/A
Delamination	DIN 53530:1981-02	CTL	Newton	n/a	n/a	n/a	n/a	n/a

Centexbel

Centexbel

							ı	1
Cleaning specifications								
Test	Test specification	Executed by laboratory:	Unit	Testresult		Norm RALGZ430/4:2019-01		Norm DIN EN 14 465:2006-09
			1					1
				Warp	Weft	DGM	DGM+	



Chemical substances









REACH

Oeko-Tex, product class II















