


NORONEN

Ark



Ark-101

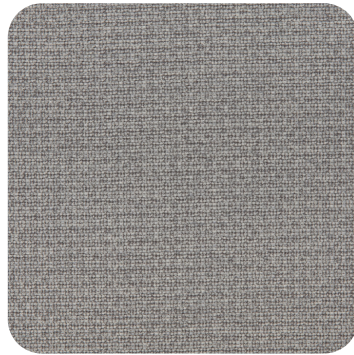

Ark-104



Ark-105



Ark-118



Ark-204




Ark-211



Ark-306




Ark-315

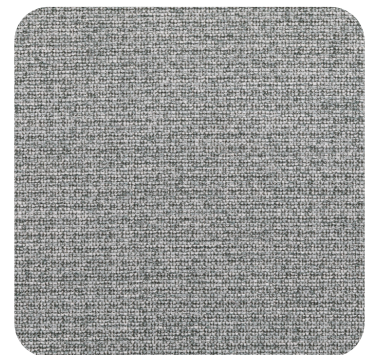


Ark-400

NORONEN


Ark

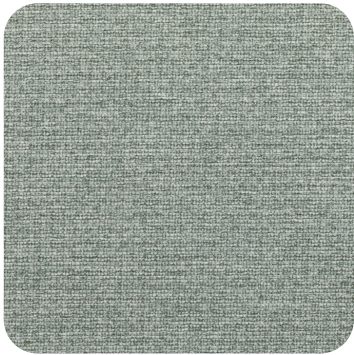

Ark-402

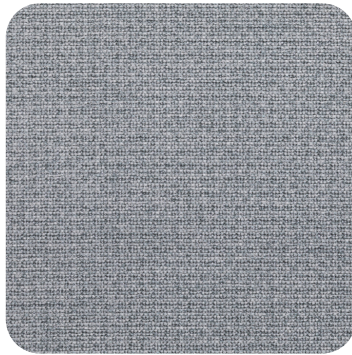


Ark-500

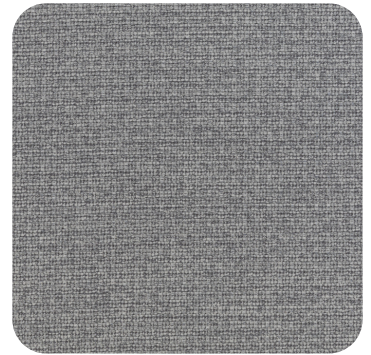


Ark-503




Ark-704

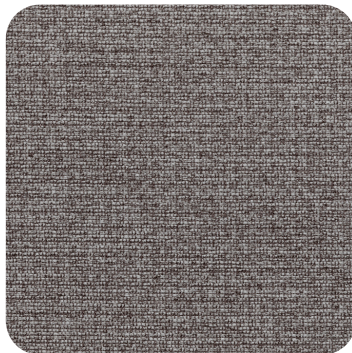


Ark-800

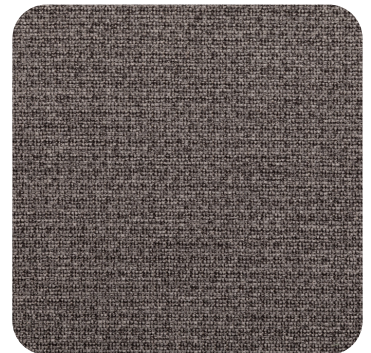

Ark-805

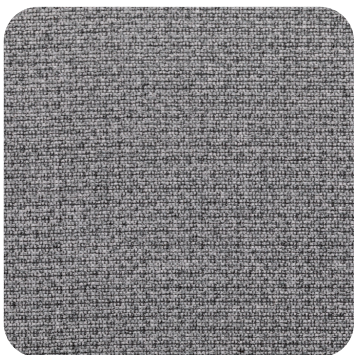

Ark-809

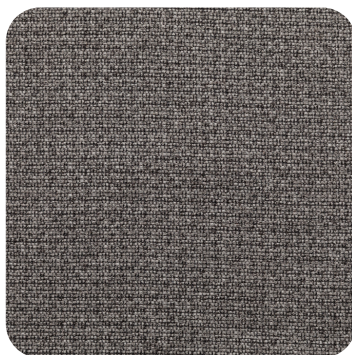

Ark-811

SLIBBROEK 39
5081 NR HILVARENBEEK
NETHERLANDS
+31 13 50 57 555
+31 13 50 57 554
WWW.LEOTEX.NL
KVK NR: 18023875

Ark

Product information



Total composition	100% PES
Composition faceside	100% PES
Composition backing	100% PES
Water repellent finish	Yes
Useful fabric width	140 +/- 2%cms
Average roll length	40m
Fabric weight HS code	330 g/m2 5407520000

Important fabric characteristics

- ☐ Upholstery fabrics are sensitive to direct influx of ultraviolet light (sun-or halogen light) and may discolour over time.
- ☐ Intense and dark colours are more sensitive to discoloration caused by ultraviolet light.
- ☐ Intense and dark colours have a lower rub fastness grade.
- ☐ Wet fabrics have a lower rub fastness grade.
- ☐ Dye lot differences may occur.
- ☐ Pilling caused by clotting of upholstery fabric fibres with dust or other fibres may occur.
- ☐ It is recommended to maintain the humidity level of the room to guarantee the elasticity of the fibres and avoid build-up of static electricity.
- ☐ Light and plain fabrics are more sensitive to staining.
- ☐ Direct contact with chemical solvents (e.g. in glue sprays) can deteriorate fabric properties.
- ☐ In contact with sharp objects scissors, cutters, nails ...) surface damage or pulled loops are unavoidable.
- ☐ Do not expose upholstery fabric to direct heat sources.

Fabric care instructions



Ark

Product information



Technical specifications

<u>Martindale</u>		EN ISO 12947-2:2016
30.000	rubs (yarn breakage)	
<u>pilling according to Martindale method</u>		EN ISO 12945-2:2000
note 4	500 rubs	
note 4	1.000 rubs	
note 4	2.000 rubs	
note 4	5.000 rubs	
<u>seam slippage</u>		EN ISO 13936-2:2004
2,7 mm	warp	
4 mm	weft	
<u>tear strength</u>		EN ISO 13937-3:2000
94 Nabs	warp	
90 Nabs	weft	
<u>tensile strength</u>		EN ISO 13934-1:2013
800 N	warp	
460 N	weft	
<u>light fastness</u>		EN ISO 105-B02:2014
note 4	dark colours	
note 4	light colours	
<u>rub fastness - wet</u>		EN ISO 105-X12:2002
note 4-5	dark colours	
note 4-5	light colours	
<u>rub fastness - dry</u>		EN ISO 105-X12: 2002
note 4-5	dark colours	
note 4-5	light colours	
<u>flame retardancy level</u>		DIN EN 1021-1:2014
PASS	cigarette	

