



NORONEN

Nordic

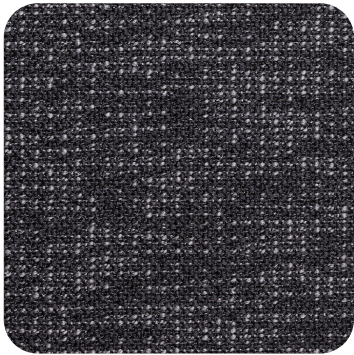

Nordic-100

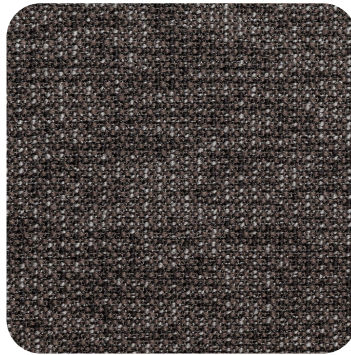

Nordic-101



Nordic-104




Nordic-105




Nordic 204




Nordic 319

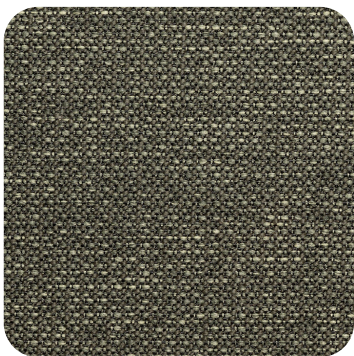

Nordic 400

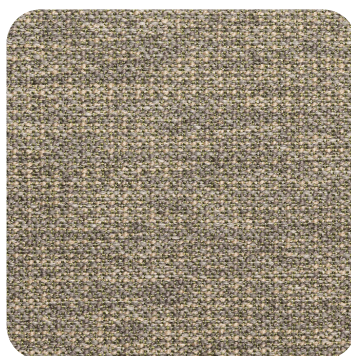


Nordic 411

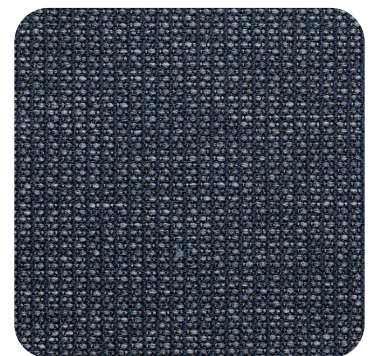


Nordic 500

NORONEN

Nordic

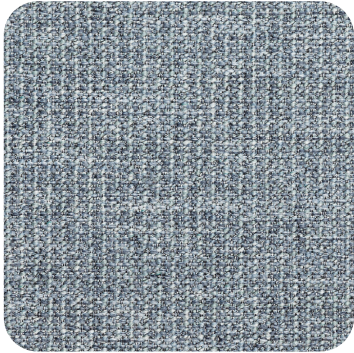


Nordic 519

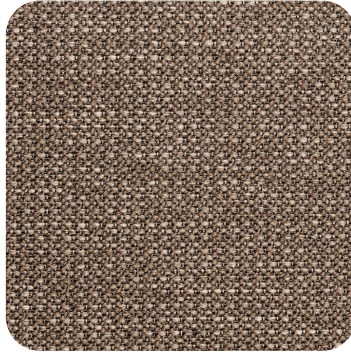

Nordic 800



Nordic 808

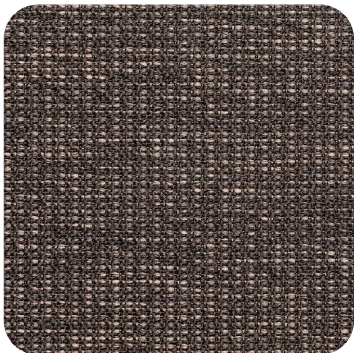

Nordic 818

SLIBBROEK 39
 5081 NR HILVARENBEEK
 NETHERLANDS
 +31 13 50 57 555
 +31 13 50 57 554
 WWW.LEOTEX.NL
 KVK NR: 18023875

Nordic


Product information

Total composition	100% PES
Composition faceside	100% PES
Composition backing	Not applicable
Water repellent finish	No
Useful fabric width	142 +/- 2%cms
Average roll length	35m
Fabric weight	470 g/m ²
HS code	5407930000

Important fabric characteristics

- ☐ Upholstery fabrics are sensitive to direct influx of ultraviolet light (sun-or halogen light) and may discolour over time.
- ☐ Intense and dark colours are more sensitive to discoloration caused by ultraviolet light.
- ☐ Intense and dark colours have a lower rub fastness grade.
- ☐ Wet fabrics have a lower rub fastness grade.
- ☐ Dye lot differences may occur.
- ☐ Pilling caused by clotting of upholstery fabric fibres with dust or other fibres may occur.
- ☐ It is recommended to maintain the humidity level of the room to guarantee the elasticity of the fibres and avoid build-up of static electricity.
- ☐ Light and plain fabrics are more sensitive to staining.
- ☐ Direct contact with chemical solvents (e.g. in glue sprays) can deteriorate fabric properties.
- ☐ In contact with sharp objects scissors, cutters, nails ...) surface damage or pulled loops are unavoidable.
- ☐ Do not expose upholstery fabric to direct heat sources.

Fabric care instructions



SLIBBROEK 39
5081 NR HILVARENBEEK
NETHERLANDS
+31 13 50 57 555
+31 13 50 57 554
WWW.LEOTEX.NL
KVK NR: 18023875

Nordic

Product information

Technical specifications

<u>Martindale</u> > 100.000		EN ISO 12947-2:2016
pilling according to Martindale method		
	500 rubs (yarn breakage)	
		EN ISO 12945-2:2000
note 4-5	500 rubs	
note 4-5	1.000 rubs	
note 4-5	2.000 rubs	
note 4-5	5.000 rubs	
<u>seam slippage</u>		EN ISO 13936-2:2004
2 mm	warp	
3 mm	weft	
<u>tear strength</u>		EN ISO 13937-3:2000
140 Nabs	warp	
430 Nabs	weft	
<u>tensile strength</u>		EN ISO 13934-1:2013
1200 daN	warp	
2000 daN	weft	
<u>light fastness</u>		EN ISO 105-B02:2014
note 4	dark colours	
note 4	light colours	
<u>rub fastness - wet</u>		EN ISO 105-X12:2002
note 4	dark colours	
note 4	light colours	
<u>rub fastness - dry</u>		EN ISO 105-X12: 2002
note 4	dark colours	
note 4	light colours	
<u>flame retardancy level</u>		
-	cigaret	DIN EN 1021-1:2014

