

# NORONEN

## Rush



Rush 101



Rush 104



Rush 105



Rush 119



Rush 201




Rush 203



Rush 215



Rush 312

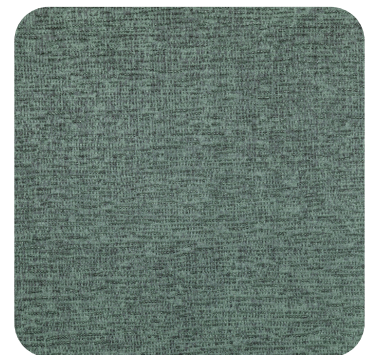

Rush 400



# NORONEN

## Rush



Rush-401



Rush-500



Rush-519



Rush-800



Rush-801



Rush-802



Rush-808



Rush-809

SLIBBROEK 39  
5081 NR HILVARENBEEK  
NETHERLANDS  
+31 13 50 57 555  
+31 13 50 57 554  
WWW.LEOTEX.NL  
KVK NR: 18023875

# Rush

## Product information




Total composition	100% PES
Composition faceside	100% PES
Composition backing	100% PES
Water repellent finish	Yes
Useful fabric width	140 +/- 2%cms
Average roll length	31m
Fabric weight	430 g/m2
HS code	6005370000

### Important fabric characteristics

- ☐ Upholstery fabrics are sensitive to direct influx of ultraviolet light (sun-or halogen light) and may discolour over time.
- ☐ Intense and dark colours are more sensitive to discoloration caused by ultraviolet light.
- ☐ Intense and dark colours have a lower rub fastness grade.
- ☐ Wet fabrics have a lower rub fastness grade.
- ☐ Dye lot differences may occur.
- ☐ Pilling caused by clotting of upholstery fabric fibres with dust or other fibres may occur.
- ☐ It is recommended to maintain the humidity level of the room to guarantee the elasticity of the fibres and avoid build-up of static electricity.
- ☐ Light and plain fabrics are more sensitive to staining.
- ☐ Direct contact with chemical solvents (e.g. in glue sprays) can deteriorate fabric properties.
- ☐ In contact with sharp objects scissors, cutters, nails ...) surface damage or pulled loops are unavoidable.
- ☐ Do not expose upholstery fabric to direct heat sources.

### Fabric care instructions



# Rush

## Product information



### Technical specifications

<u>Martindale</u>		EN ISO 12947-2:2016
60000	rubs (pile worn off > 5mm <sup>2</sup> )	
> 100.000	rubs (yarn breakage)	
<u>pilling according to Martindale method</u>		EN ISO 12945-2:2000
note 4-5	500 rubs	
note 4-5	1.000 rubs	
note 4-5	2.000 rubs	
note 4-5	5.000 rubs	
<u>seam slippage</u>		EN ISO 13936-2:2004
1 mm	warp	
1 mm	weft	
<u>tear strength</u>		EN ISO 13937-3:2000
54 Nabs	warp	
33 Nabs	weft	
<u>tensile strength</u>		EN ISO 13934-1:2013
790 daN	warp	
480 daN	weft	
<u>light fastness</u>		EN ISO 105-B02:2014
note 4-5	dark colours	
note 4-5	light colours	
<u>rub fastness - wet</u>		EN ISO 105-X12:2002
note 4-5	dark colours	
note 4-5	light colours	
<u>rub fastness - dry</u>		EN ISO 105-X12: 2002
note 4-5	dark colours	
note 4-5	light colours	
<u>flame retardancy level</u>		
PASS	cigaret	DIN EN 1021-1:2014

