

















Orion

This nice and luxurious flatwoven quality has a matt and linen structure. Orion is made from 100% recycled polypropylene.

We have created this sustainable textile together with a weaver who is specialized in yarn-dyed sustainable fabrics. This environmental friendly quality has been woven on a dolby loom and has a nice, luxurious linen and woolen look.

Orion is available from stock in a fresh and wide colour line, suitable for fitted and loose-fitting upholstery. Perfect to combine with other Fabraa qualities and besides that it is durable and machine-washable at 30 degrees Celsius*.

- We recommend to wash the cover inside out and immediately place the cover back to the piece of furniture slightly damp after washing.

Fabraa Upholstery fabrics with a conscience. We make sustainable choices easy by offering a wide range of high-qualty, affordable upholstery fabrics with consideration for the conditions throughout the supply chain.


Composition

/ faceside 100%RPP / backside n/a / flatweave

Suitable for



Please note: colours may vary according to your screen settings.

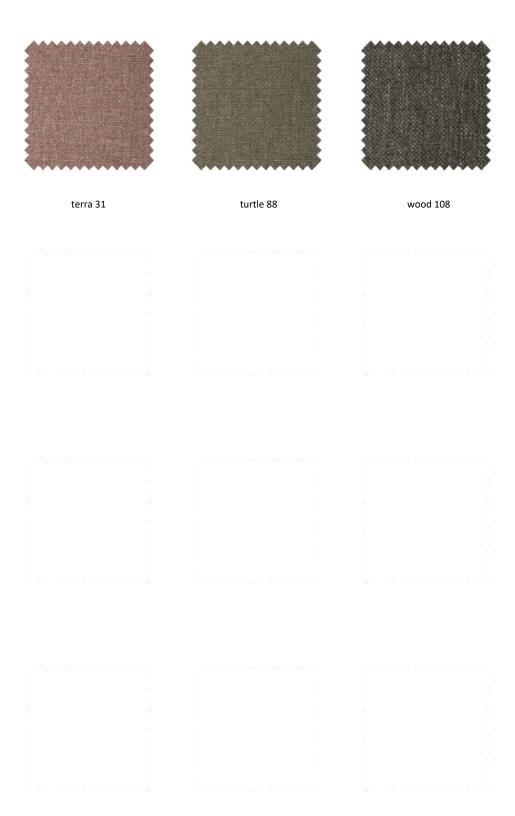

Orion - Article passport

A nice and luxurious flatwoven quality with a dull linen structure.

Available from stock in a wide range of contemporary and commercial colours.

Product characteristics		
Productgroup	flatweave	
Applications	sofa's, beds, chairs with fitted and loose fitting upholstery	
Composition faceside	100%RPP	
Composition backside	n/a	
Bonding / Coating	n/a	
Statistic code	54077300	
Dyeing method	yarn dyed	
Available colours	15	
Packaging	transparent plastic	

Durability specifications	•	•						
Test	Test specification	Executed by laboratory:	Unit	Testresult		Norm RALGZ430/4:2019-01		Norm DIN EN 14 465:2006-09
				Dry	Wet	DGM	DGM+	
Abrasion resistance - yarn breakage	DIN EN ISO 12947-1:2007-04, DIN EN ISO 12947-2:2017-03	CTL	cycles	50.000		min. 12.000	min. 16.000	A
Pilling	DIN EN ISO 12945-2:2000-11. 2000 cycles	CTL	grade	4-5		min. 3-4	min. 4	А
Colour fastness to light	DIN EN ISO 105-BO2:2014-11. Process 3, exposure level 5							
	light colours	CTL	grade 5		5	min. 4	min.5	В
	middle colours	CTL	grade	5		min. 4	min.5	В
	dark colours	CTL	grade			min. 4	min.5	В
Colour fastness to rubbing	DIN EN ISO 105-X12:2016-11							
	light colours	CTL	grade	5	5	dry: 4, wet: 3	dry: > 4, wet: 3-4	A/A
	middle colours	CTL	grade	5	5	dry: 4, wet: 3	dry: > 4, wet: 3-4	A/A
	dark colours	CTL	grade	5	5	dry: 4, wet: 3	dry: > 4, wet: 3-4	A/A
Ignitability (cigarette test)	BS 5852 part 1 (1979) from The Furniture and Furnishing (Fire) (Safety) regulations: 1988 No. 1324. Schedule 4 part 1 Ignition source 0: cigarette	СТІ		passed				

	1							
Processingspecifications								
Minimum workable width in centimeters	± 138							
Roll length in meters	± 40							
Material weight in grams per linear meter	± 434							
Test	Test specification	Executed by laboratory:	Unit	Testresult		Norm RALGZ430/4:2019-01		Norm DIN EN 14 465:2006-09
				Warp	Weft	DGM	DGM+	
Tensile strength	DIN EN ISO 13934-1:2013-08	CTL	Newton	779	587	min. 350	min. 400	A/B
Tensile strength Tear growth resistance	DIN EN ISO 13934-1:2013-08 DIN EN ISO 13937-3:2000-06	CTL CTL	Newton Newton	779 157,4	587 106,4	min. 350 min. 25	min. 400 min. 30	A/B A/A
								· ·

Centexbel

Centexbel

Cleaning specifications								
Test	Test specification	Executed by laboratory:	Unit	Testresult		Norm RALGZ430/4:2019-01		Norm DIN EN 14 465:2006-09
				Warp	Weft	DGM	DGM+	
Dimensional change for washing 30 degrees celcius / air drying	DIN EN ISO 5077:2008-04	CTI	%	0.0	-0.4	n/a	n/a	Δ/Δ



Chemical substances









REACH

Oeko-Tex, product class II

DIN EN ISO 6330:2013-02,
DIN EN ISO 3759:2011-08

- We recommend to wash the cover inside out and immediately place the cover back to the piece of furniture slightly damp after washing.



passed

certified









